


2xOFI 202-150BD6 (oil-less)

| | | | | | | | | | | | | | |
|-----------------------------|----------|-------|-------|-------|-------|-------|-------|--|--|--|--|--|--|
| Voltage | V | 200 | 200 | 230 | 240 | 3x400 | 3x440 | | | | | | |
| Frequency | Hz | 50 | 60 | 50 | 60 | 50 | 60 | | | | | | |
| Motor | HP | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 | | | | | | |
| | kW | 2.94 | 2.94 | 2.94 | 2.94 | 2.94 | 2.94 | | | | | | |
| Displacement | l/min | 580 | 656 | 580 | 656 | 580 | 656 | | | | | | |
| | CFM | 20.48 | 23.17 | 20.48 | 23.17 | 20.48 | 23.17 | | | | | | |
| FAD @ 8 bar ³⁾ | l/min | 260 | 292 | 260 | 292 | 260 | 292 | | | | | | |
| | CFM | 9.18 | 10.31 | 9.18 | 10.31 | 9.18 | 10.31 | | | | | | |
| Max. pressure ¹⁾ | bar | 8 | 8 | 8 | 8 | 8 | 8 | | | | | | |
| | psi | 120 | 120 | 120 | 120 | 120 | 120 | | | | | | |
| Max. current | A | - | - | 16.0 | 18.0 | 10.0 | 10.0 | | | | | | |
| Tank size | litres | 150 | 150 | 150 | 150 | 150 | 150 | | | | | | |
| | gallon | 39.6 | 39.6 | 39.6 | 39.6 | 39.6 | 39.6 | | | | | | |
| Weight | kg | 146 | 146 | 146 | 146 | 146 | 146 | | | | | | |
| | lbs | 322 | 322 | 322 | 322 | 322 | 322 | | | | | | |
| Noise level | dB(A)/1m | 79 | 78 | 79 | 78 | 79 | 78 | | | | | | |
| Thermal protection | | Yes | Yes | Yes | Yes | Yes | Yes | | | | | | |
| Duty cycle | | 100% | 100% | 100% | 100% | 100% | 100% | | | | | | |

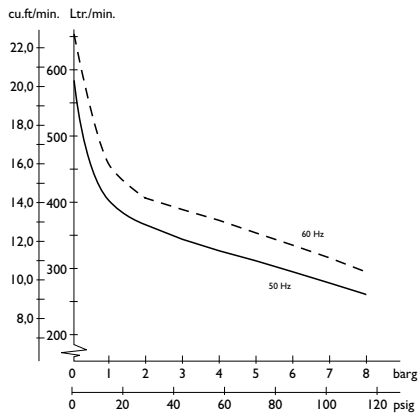

Dimensions (l x w x h)
1250 x 616 x 873 mm / 49²/₈ x 24²/₈ x 34³/₈ inch

- ¹⁾ Higher pressure available upon request
³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved



JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com