


OFI 202-40MD3 (oil-less)

Voltage	V	230	230	3x400	3x400										
Frequency	Hz	50	60	50	60										
Motor	HP	2.0	2.0	2.0	2.0										
	kW	1.47	1.47	1.47	1.47										
Displacement	l/min	290	328	290	328										
	CFM	10.24	11.58	10.24	11.58										
FAD @ 8 bar/120 psi ¹⁾	l/min	130	146	130	146										
	CFM	4.59	5.16	4.59	5.16										
Max pressure ²⁾	bar	8	8	8	8										
	psi	120	120	120	120										
Max. current	A	8	9	5	5										
Tank size	litres	40	40	40	40										
	gallon	10.6	10.6	10.6	10.6										
Weight	kg	121	121	121	121										
	lbs	267	267	267	267										
Noise level	db(A)	60	63	60	63										
Thermal protection		Yes	Yes	Yes	Yes										
Duty cycle		100%	100%	100%	100%										

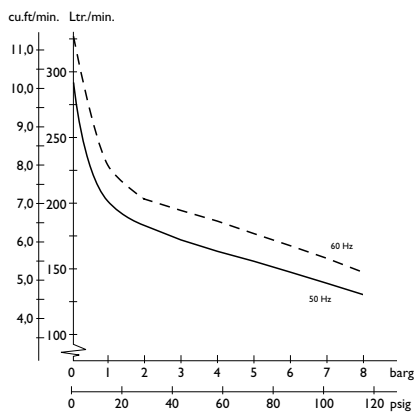

Dimensions (l x w x h)
661 x 643 x 856 mm / 26 x 25³/₈ x 33⁶/₈ inch

¹⁾ FAD is reduced by 18-20% on units with dryer.
Minimum pressure required to operate: 6 bar/90 psi

²⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR 

IDEX
IDEX CORPORATION

E-mail: info@jun-air.dk
Internet: www.jun-air.com

