


OF30 I-4B (oil-less)

Voltage	V	100	100	120	200	200	230	230	3x400	3x440		
Frequency	Hz	50	60	60	50	60	50	60	50	60		
Motor	HP	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33		
	kW	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24		
Displacement	l/min	54	68	68	54	68	54	68	54	68		
	CFM	1.91	2.40	2.40	1.91	2.40	1.91	2.40	1.91	2.40		
FAD @ 8 bar	l/min	20	23	23	20	23	20	23	20	23		
	CFM	0.71	0.81	0.81	0.71	0.81	0.71	0.81	0.71	0.81		
Max. pressure	bar	8	8	8	8	8	8	8	8	8		
	psi	120	120	120	120	120	120	120	120	120		
Max. current	A	4.5	4.5	4.2	2.6	2.4	2.1	2.2	0.8	0.8		
Tank size	litres	4	4	4	4	4	4	4	4	4		
	gallon	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1		
Weight	kg	19	19	19	19	19	19	19	19	19		
	lbs	42	42	42	42	42	42	42	42	42		
Noise level	dB(A)/1m	65	66	66	65	66	65	66	65	66		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

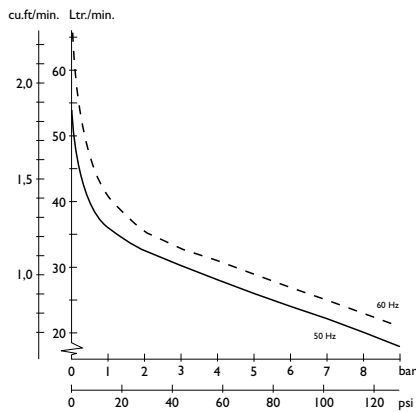

Dimensions (l x w x h)
382 x 300 x 334 mm / 15 x 11 6/8 x 13 1/8 inch

Technical modifications reserved

JUN-AIR®

